

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 07-045171

(43)Date of publication of application : 14.02.1995

(51)Int.Cl.

H01H 37/54  
H02H 7/085  
H02K 11/00  
H02K 17/30

(21)Application number : 05-187957

(71)Applicant : MATSUSHITA REFRIG CO LTD

(22)Date of filing : 29.07.1993


(72)Inventor : MORIKAWA YUKIO

## (54) OVERLOAD PROTECTIVE DEVICE FOR MOTOR

## (57)Abstract:

PURPOSE: To provide an overload protective device for a motor having high safety by which a circuit can be completely broken even if a contact point is firmly welded and whose operation is stable in the overload protective device for the motor having high safety in the final stage of the service life.

CONSTITUTION: A thermosensible base part 16 having bimetal 9, a leaf spring shape energizing member 13 and a heater 5 are joined in series to each other. The energizing member 13 is joined to the thermosensible base part 16 through a heat fusible material 14. When an overcurrent is flowed, the heater 5 is heated, and the heat fusible material 14 is melted, and the energizing member 13 is separated from the thermosensible base part 16.

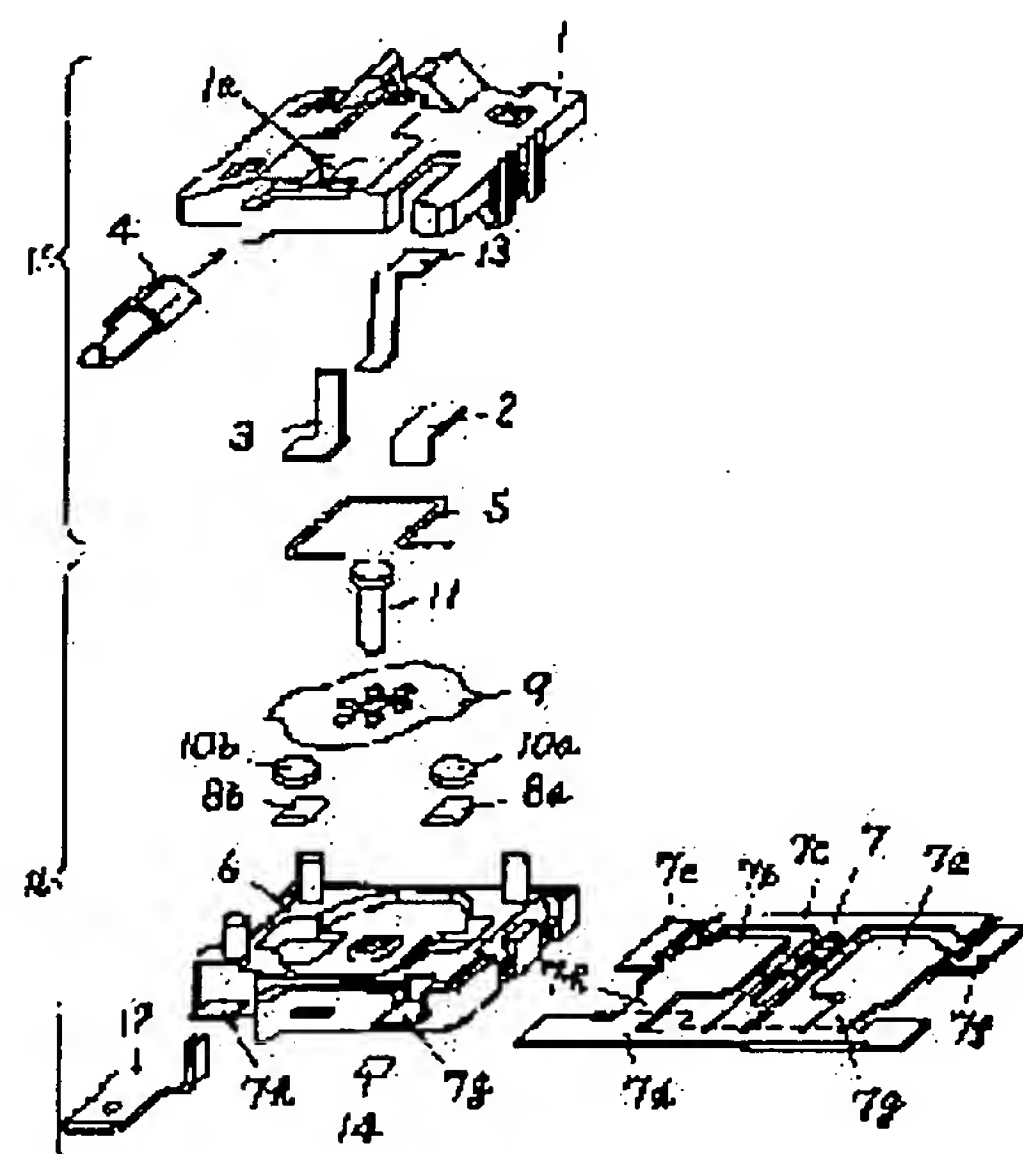

## LEGAL STATUS

[Date of request for examination] 27.07.2000

[Date of sending the examiner's decision of rejection] 05.04.2005

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

✓ [Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office